


**FILL IN SHADED AREAS TO COMPLETE THE PART DESCRIPTION**

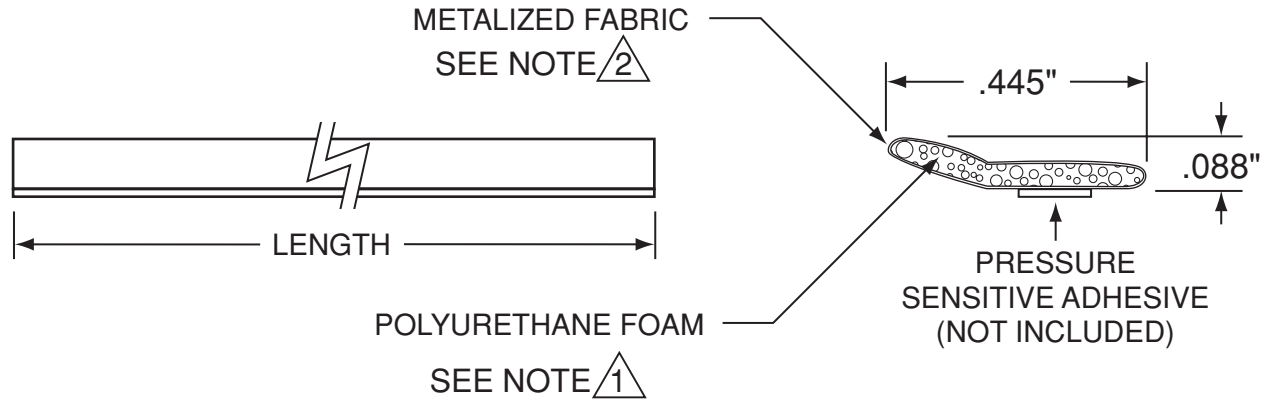

**SELECT ADHESIVE MOUNTING OPTION**

WITH PRESSURE SENSITIVE ADHESIVE.  
WITHOUT PRESSURE SENSITIVE ADHESIVE.

**FILL IN LENGTH IN INCHES BELOW**


Fill in length to two decimals (LL.LL). Maximum 84.00 inches.

**TECH-ETCH MANUFACTURING PART NUMBER**

2451 - 101 - 0196 -  
(PROFILE) - (LENGTH)

NOTES:

- $\triangle 1$  OPEN-CELLED POLYURETHANE FOAM CORE.
- $\triangle 2$  NICKEL PLATING OVER COPPER SUBSTRATE FABRIC.
- 3. COMPRESSION SET (ASTM D3574) 2.6%.
- 4. FLAMMABILITY RATING UL 94 V-RATED.
- 5. COMPRESSION DEFLECTION (ASTM D3574) 1.47 PSI.
- 6. SURFACE RESISTIVITY (ASTM F390) <.02 OHMS.
- 7. SERVICE TEMPERATURE -40°F TO 194°F (-40°C TO 90°C).
- 8. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

|   |   |
|---|---|
| UNLESS OTHERWISE SPECIFIED ALL TOLERANCES TO BE:<br>HEIGHT & WIDTH<br><.100 ±.02<br>>.100 ±.03<br>LENGTH<br>1 TO 6 ±.03<br>6 TO 11 ±.05<br>11 TO 24 ±.15<br>24+ +1/-.25 |  <p>45 Aldrin Road, Plymouth, MA 02360<br/>TEL 508-747-0300 • FAX 508-746-9639<br/>sales@tech-etich.com • www.tech-etich.com</p> |
| SCALE:<br>300%  |   |
| DATE:<br>1/29/04  | PART NAME:<br>Knife Edge Metalized Fabric Gasket  |
| CUSTOMER PART NUMBER:   |   |